Elettrodi di Riferimento Portatili $Cu/CuSO_4$
Portable Reference Electrodes $Cu/CuSO_4$

SEAGUARD® CATHODIC PROTECTION

CMP Europe Division

La cella di riferimento $Cu/CuSO_4$ rappresenta lo standard per la misurazione del potenziale di superfici interrate nelle installazioni industriali e può essere usata con qualsiasi voltmetro ad alta resistenza normalmente impiegato nel campo della protezione catodica.

Le celle di riferimento possono essere fornite con cavi secondo le specifiche richieste del cliente.

Dimensioni:

PORTACELL 30 (223 x 45 Ø mm)

PORTACELL 100 (85 x 110 Ø mm)

The Copper/Copper Sulphate half cell is the accepted standard for the measurement of surface potentials for land installations and can be used with any high resistance voltmeter normally used in the field of cathodic protection.

The half cells can be supplied with cables according to customer specification.

Dimensions:

PORTACELL 30 (223 x 45 Ø mm)

PORTACELL 100 (85 x 110 Ø mm)

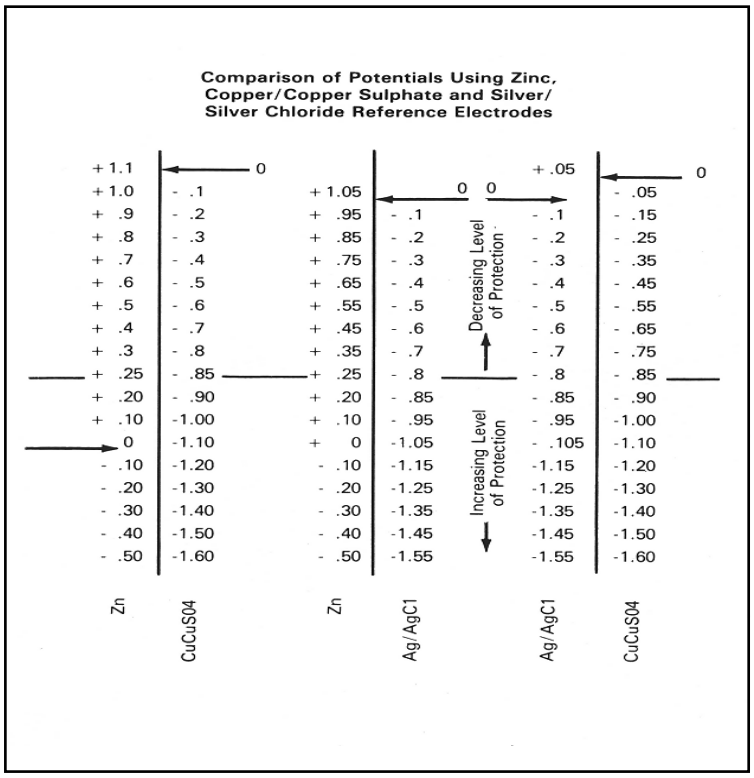

Tabella di comparazione dei potenziali con celle di riferimento in zinco – rame / solfato di rame e argento / cloruro d'argento

Comparison of potentials using zinc, copper / copper sulphate and silver / silver chloride reference electrodes

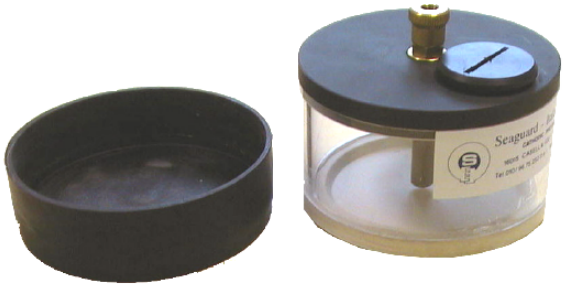

PORTACELL 100

Per misurazioni su asfalto e cemento

For measurement on asphalt and cement

PORTACELL 30

Per misurazioni su terreno

For measurement on ground

CMP Group s.r.l.

Via Regiosi, 12 - 16015 Casella (GE) - Italy

Ph.+390109675252-Fax+390109675254

Web: www.seaguard.it - www.cmpgroup.net

E-mail: tec@seaguard.it - com@seaguard.it

VAT / Tax Code: 02055420992

Rev: 002 dated 19/11/2019